


Base Station™ Vertical Rack System

..... Cut Sheet & Quick Specifications

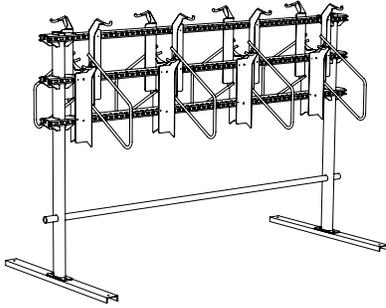

MATERIALS & FEATURES

- Offset® vertical bike docks mounted to a free standing system
- Zinc plated steel dock mounting hardware
- Bikes are offset by 12.5" (**See cut sheet for Offset® Vertical**)
- Single sided freestanding vertical bike parking system
- Electro galvanized U-rails, zinc plated mounting hardware
- 1.9" Kick Tube, hot-dipped galvanized steel pipe
- 2 Universal support towers, DuraPlas® coated steel
- 2 Universal free-standing legs, DuraPlas® coating
- Tower Assembly Hardware Kit, hot-dipped galvanized steel

FINISH

- Duraplas™ black towers
- Electro-galvanized rails
- Hot-dipped galvanized tubing

CONFIGURATIONS & FOOTPRINT W/BIKES

- CS38 - 38"L x 152"W x 92"H
- CS66 - 66"L x 152"W x 92"H
- CS95 - 95"L x 152"W x 92"H
- CS120 - 120" L x 152"W x 92"H




MOUNTING OPTIONS


- Free standing
- Surface (**Optional**)

SPACE USE RECOMMENDATIONS


Racks can be spaced 31.5" (**for 24" bike-to-bike spacing**) or 28.5" (**for 21" bike-to-bike spacing**) apart
 Ceiling height: minimum 92"
 Loading zone: recommended 48" - 72"
 Distance to wall: Minimum 18" from end of freestanding rack

Please contact us or see the CSA models for more information.
 All images shown are double sided Base Stations, but are also available as single side Base Stations.

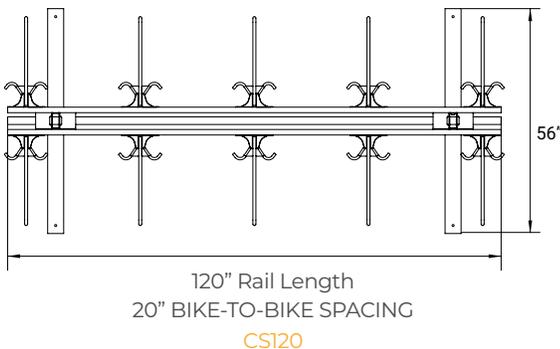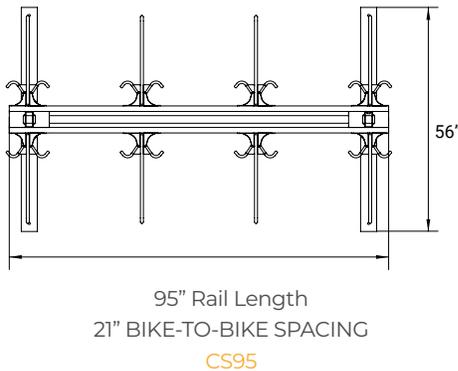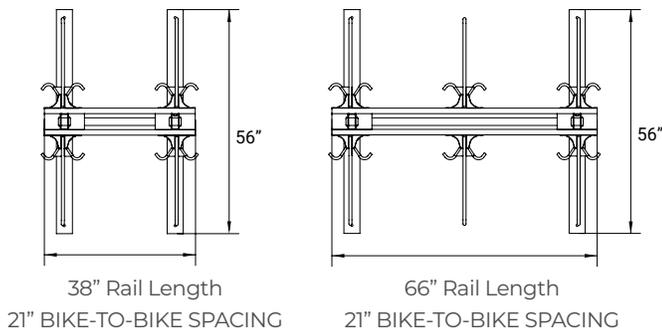




57" Rail Length
 21" BIKE-TO-BIKE SPACING
 CSA57

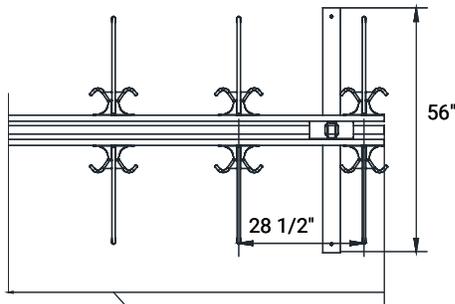

86" Rail Length
 21" BIKE-TO-BIKE SPACING
 CSA86

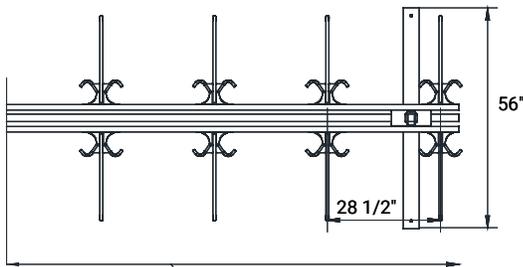

120" Rail Length
 21" BIKE-TO-BIKE SPACING
 CSA114

MATERIALS & FEATURES

- Offset® vertical bike docks mounted to a free standing system
- Zinc plated steel Dock mounting hardware
- Bikes are offset by 12.5" (**See cut sheet for Offset® Vertical**)
- Single sided freestanding vertical bike parking system
- Electro galvanized U-rails, zinc plated mounting hardware
- 1.9" Kick Tube, hot-dipped galvanized steel pipe
- 2 Universal support towers, DuraPlas® coated steel
- 2 Universal free-standing legs, DuraPlas® coating
- Tower Assembly Hardware Kit, hot-dipped galvanized steel

FINISH

Duraplas™ black towers
 Electro-galvanized rails
 Hot-dipped galvanized tubing

CONFIGURATIONS & FOOTPRINT W/BIKES

- CSA57 - 57"L x 152"W x 92"H
- CSA86 - 86"L x 152"W x 92"H
- CSA114 - 114"L x 152"W x 92"H

*Includes minimum loading zone, 48"

MOUNTING OPTIONS

- Free standing
- Surface (**Optional**)

SPACE USE RECOMMENDATIONS

Racks can be spaced 31.5" (**for 24" bike-to-bike spacing**) or 28.5" (**for 21" bike-to-bike spacing**) apart
 Ceiling height: minimum 92"
 Loading zone: recommended 48" - 72"
 Distance to wall: Minimum 18" from end of freestanding rack