

MATERIALS & FEATURES

- Steel ASTM A36 sheet metal
- "A" shaped support frame made from ASTM A500 Steel pipe
- Laser cut steel arched and crowned locking loops
- 2 push or electric scooters and bikes
- EPDM rubber molded guards reduce metal-to-metal contact
- 8 3/8" separation cross bars to eliminate entanglement and reduce bikes and scooters from sliding down rack and laying on ground
- 31 lbs.

FINISHES

- UV Resistant Powder Coat - Metallic Grey (Standard)

MOUNTING OPTIONS


- Direct surface mount to concrete
- Rail mount accessory for freestanding applications*
**Rails come as extendable sections, each mounting 4, 6, or 8 scooters or bikes per rail segment. Segments can be adjoined to one another to create longer parking areas.*

SPACE USE RECOMMENDATIONS

- Paralell to wall: Recommended 30" from rack center*
- Paralell to street: Recommended 45" from rack center*
- Recommended separation: 42" for most user-friendly
- Best use of space: 36" separation for bike efficiency
**Diagonal positioning will reduce walk space for narrow areas.*

For layout, ordinance or planning assistance, please contact our planning team @ 800-630-7225.



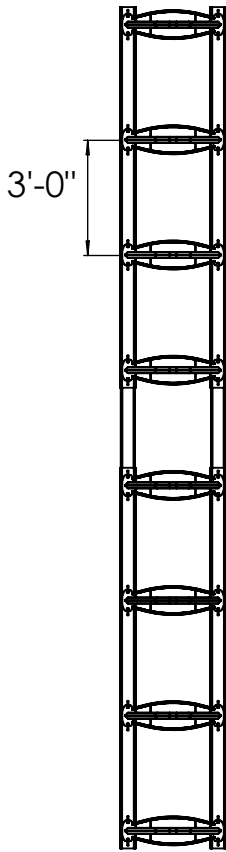

MATERIALS & FEATURES

- Steel ASTM A36 sheet metal
- Comes as 4, 6 and 8 scooter and bike rail segments
- Extendable using extension rail segments and common rack mounting hardware for infinite lengths and combinations (16 scooter and bike extended segment shown)
- Can be used with other products from Ground Control Systems

MOUNTINGS

- Used for freestanding applications
- Permanent Mount - Trading out rail hardware for achors

HARDWARE

- Hot Dip Galvanized (Standard)
- Stainless Steel (Upon request - Additional cost)

FINISHES

- UV Resistant Powder Coat - Metallic Grey (Standard)
- Hot Dip Galvanized (special order with longer lead time)

