

MATERIALS & FEATURES

- Thick-walled DOM tubing
- TIG welded to laser-cut steel
- Stainless steel aircraft cable

FINISH OPTIONS

UV Resistant Powder Coat (Red Or Black)

MOUNTING OPTIONS

Surface Mount


Bolts to concrete with 3/8" anchors


Note: this unit is to be mounted to concrete only.

MINIMAL SPACE USE RECOMMENDATIONS

Note: These setbacks are for the bike pump and work stand when installed together

- Public Work Stand
- Walls or Object Setbacks: Minimum 48"
- Parallel Wall Setbacks: Minimum 12"
- Perpendicular Street Setbacks: Minimum 60"
- Parallel Street Setbacks: Minimum 96"
- *These are our suggested minimal clearances
- Public Bike Pump or High Security Bike Pump
- Mount in line with the flange for the Work Stand maximum 6" away.

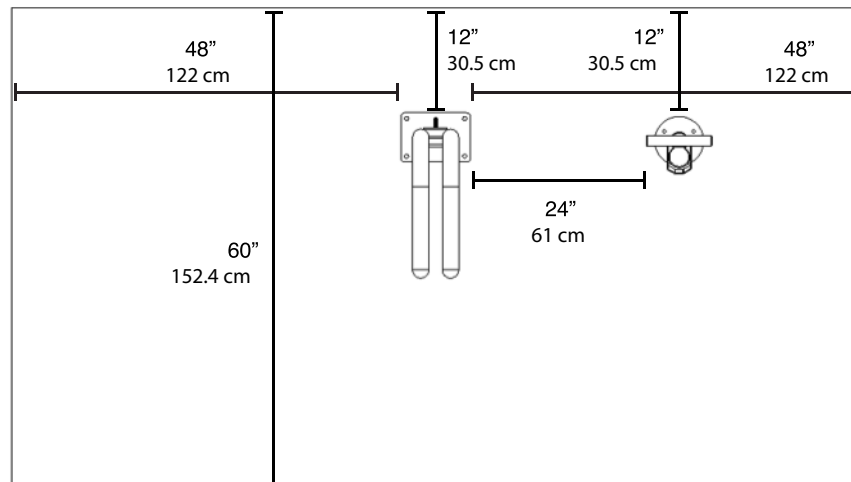

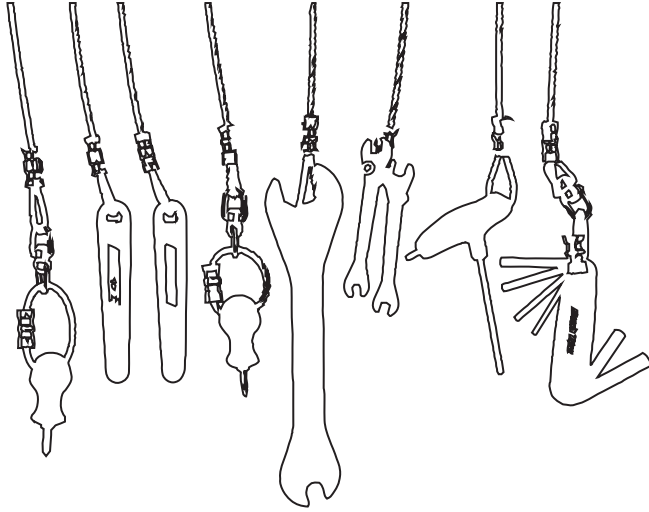

TOOLS

- Hex key set
- Torx T-25
- Steel core tire levers (2)
- Adjustable wrench
- 13/15mm cone wrench
- Philips & standard screwdrivers